

## Thermo FLEX F50



## Customize button

### Customized buttons for more efficient measurements

You can set frequently used functions to three buttons.

#### Assignable functions

- Light ON / OFF • Image rotation • Composite display switching
- Auto scale ON / OFF • Temperature alarm ON / OFF
- Color alarm ON / OFF • Information ON / OFF
- Menu display ON / OFF • Switch to preview
- Thumbnail switching • Live mode switching

#### Default

- Blue: LED light ON / OFF • Green: Auto scale • Yellow: image rotation

## Infrared Thermal Imaging Camera InfReC F50 series: Specification

		Basic model (with main basic functions)		Standard model		Online model	
		F50A-BAS	F50B-BAS	F50A-STD	F50B-STD	F50A-ONL	F50B-ONL
Basic Performance	Field of View*1	35°×35°	70°×70°	35°×35°	70°×70°	35°×35°	70°×70°
	Spatial Resolution	2.8mrad	5.3mrad	2.8mrad	5.3mrad	2.8mrad	5.3mrad
	Focal Distance	30cm to infinity*2	10cm to infinity*2	30cm to infinity*2	10cm to infinity*2	30cm to infinity*2	10cm to infinity*2
	Focus	Focus Free					
	Infrared Detector	Uncooled Focal Plane Array (Microbolometer)					
	Spectral Range	8 to 14μm					
	Recording Pixels	240×240 pixels					
	Frame Rate	7.5Hz					
	Measuring Range	-20°C to 350°C*4					
	Sensitivity (NETD)	0.05°C at 30°C					
Image Display	Accuracy	±2°C or ±2% (Indicated Value)*5					
	Auto Function	Auto Scale / Auto MAX / Auto point					
	Color Palettes	7 palettes (Olive, Rainbow, Brightness, Hot-white, Hot-black, etc.)					
	Gradation	256 / 128 / 64 / 16 grade					
	Visible Camera	CMOS camera 5M pixels					
	Visible/Thermal Fusion	Picture-In-Picture (with trimming function), Blending (transparency changeable, size & position adjustable)					
	Display Functions	1 to 4 times continuous digital zoom (Thermal, Visible, Fusion)					
	Alarm Function	Alarm Display, Alarm Sound, Color Alarm, Alarm Recording					
	Temperature Correction	Emissivity (Full image, Multi-point), Environmental/Background, Emissivity Table					
	Point Temperature	5 Movable Points, Temperature Search:MAX/MIN x1 each					
Storage & Output	Temperature Display in Assigned Region	---	---	---	BOX × 1 (MAX, MIN and AVG in Box)	---	---
	Line Profile	---	---	---	Line × 1	---	---
	Delta Temp	---	---	---	Delta T × 1	---	---
	Storage Device	micro-SD Card, Conforms to SDHC					
	Data Form	Still Image: JPEG with temperature data (14 bit) Recorded with Visible Image					
	Continuous Recording	---	---	---	Max 7.5Hz (Up to 10 sec.)	---	---
	Interval Recording	---	---	---	3 sec to 60 min interval, with Visible Image recorded	---	---
	Trend Graph	---	---	---	csv format	---	---
	Line Profile	---	---	---	csv format	---	---
	Voice Recording	30 sec Recording, replay per a Thermal image					
Others	Text Annotation	Annotate up to 128 Characters per a Thermal Image. Characters imported from SD Card					
	File Transfer	USB2.0 (MTP)					
	Real Time Transfer	---	---	---	---	USB2.0 Image transfer (Thermal image with visible image. Maximum transfer speed 75 MB/s*)	
	Display	4.8 inch HD (720 × 1280 pixels), Touch Panel					
	Auxiliary	LED Light (equipped Camera Unit)					
	Operating Temperature & Humidity	Camera Unit: -20°C to 70°C, 90%RH (non-condensing)** / Controller Unit: -20°C to 50°C, 90%RH (non-condensing)					
	Storage Temperature & Humidity	Camera Unit: -40°C to 60°C, 90%RH (non-condensing) / Controller Unit: -40°C to 60°C, 90%RH (non-condensing)					
	Drop, Vibration & Shock	Engineered to withstand 1m drop, 29.4m/s <sup>2</sup> (3G), 294m/s <sup>2</sup> (30G)					
	Dust & splash proof	Protection class IP64 equivalent					
	EMC	Conforms to CE regulations (Class A)					
Power Supply	Battery	Lithium-ion (built-in), Battery Operation: 4 hours (Typ.) (with power saving mode)					
	AC Adapter	100V - 240V AC, 50/60Hz (AC Adapter by USB cable, micro B connector)					
	Dimensions	Camera Unit: Approx. 30mm×40mm×130mm (excluding projection and cable) / Controller Unit: Approx. 169mm(H)×92mm(W)×24.5mm(D)(excluding projection and cable)					
	Weight	Camera unit: Approx. 100g / Controller unit: Approx. 400g (excluding cable)					
Accessory	Carrying case, micro SD Card, micro SD Card Adapter, USB AC Adapter, micro USB cable (for power feeding and connection), Neck Strap, Operation Manual, Software(INS9500LT)						

\*1 Tolerance: ±5% \*2 For temperature accuracy: 100cm to infinity \*3 For temperature accuracy: 30cm to infinity \*4 Environment temperature of camera unit in operation: 15°C or higher (in case of lower than 15°C: Measuring Range in -20°C to 300°C) \*5 Environment temperature of camera unit in operation: 0°C to 40°C (other conditions: ±4°C or ±4%) \*6 In order to transfer Thermal motion image by F50A-ONL/F50B-ONL, it is required to upgrade to "InfReC Analyzer NS9500 Professional" (optional software) \*7 In case of camera head use in an environment where the ambient temperature exceeds 60°C, Visible Camera will be set "OFF" by function of high temperature protection. \* This product is subject to the United States' Export Administration Regulations (EAR) for the reason that it incorporates U.S.-made components and parts. Depending on its destination or subsequent user's purpose or business, U.S. Government assessment and authorization prior to re-exporting, reselling or retransferring might be required. For details please consult our sales staff. \* Company names and product names used are trademarks or registered trademarks of each company. The screen in the catalog is a fitting synthesis. \* Description of specifications, designs, prices, etc. may be subject to change without notice. The color of the photograph may differ slightly from the actual product color because of printing.

**NIPPON AVIONICS CO., LTD.**  
<http://www.avio.co.jp/English/>

Industrial Electronic Products Sales Division  
 Thermal Imaging Department

1-5, Nishi-Gotanda 8-chome, Shinagawa-ku,  
 Tokyo 141-0031 Japan  
 Phone : +81-3-5436-1614  
 Fax : +81-3-5436-1395  
 E-mail : product-irc-e@ml.avio.co.jp



### WARNINGS & CAUTIONS

• Before using this product, please carefully read the provided Operation Manual "WARNINGS" & "CAUTIONS" section to ensure proper operation. • Please do not place the product in high temperature, high humidity or high inert gas environments.

Distributor:

## New-Style Thermal Imaging Camera With Removable Unit

# FREE STYLE

## THERMAL IMAGING CAMERA "Thermo FLEX F50"




## TOUCHSCREEN

Intuitive & Easy Operation  
 for beginners

## REMOVABLE

Removable camera head  
 for various styles & scenes

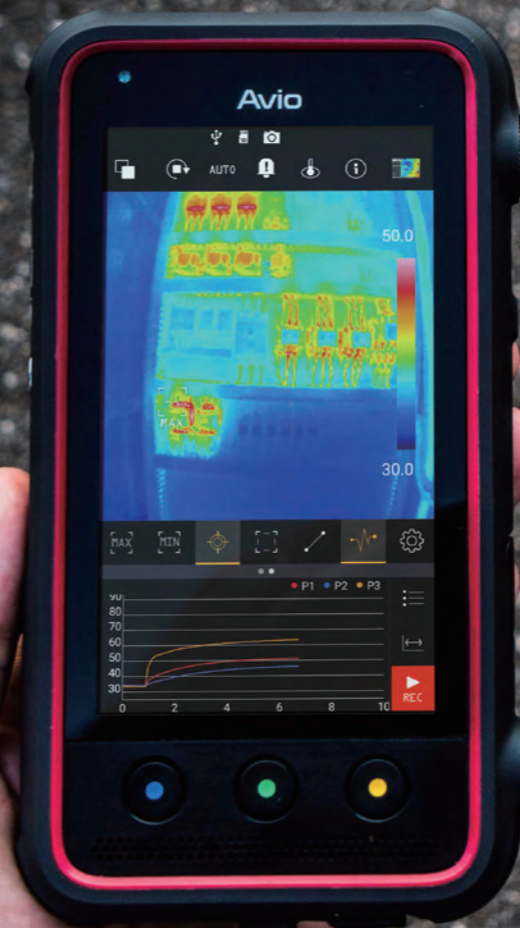





## "Angle-Free" Camera-Head to Visualize the Invisible Risks

- Tilt the camera head to measure high angle position...
- Remove the camera head to turning around the backside of the equipment...

We realized "Angle-Free" thermal imaging camera can be freely used "Rotation Style" and "Separation Style", which innovates the measurement operation. "Thermo FLEX F50" contributes to the visualization of invisible risks and the efficiency of measurement work.

## Easy and Intuitive Controller

Intuitive operation is possible with the touchscreen. Furthermore, you can operate with many hardware keys even wearing gloves. We optimized the controller for your comfortable operation in any scenes and at any angles.

## "Free Style" thermal imaging camera offers various camera styles

A new style of thermal imaging camera "Thermo FLEX F50" has a removable camera-head and controller. You can take various measurement styles in a wide variety of measurement scenes!



Rotation Style: Camera-head can be tilted and can be mounted on the both joint of controller.




Separation Style: Removed camera-head from controller. Camera-head can be freely operated.



The camera-head and controller can be mounted on tripod by screw.

## Easy Touch Operation even Beginners

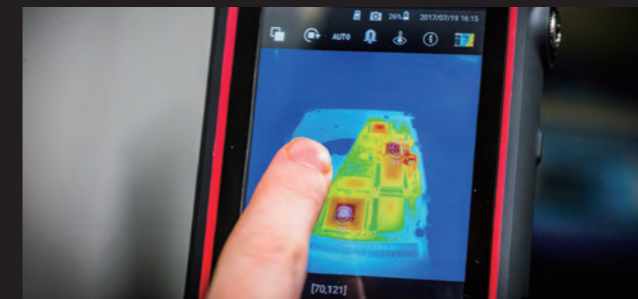

The function such as "Temperature Scale Setting" and "Point Measurement" by touch operation are equipped. Intuitive operation makes the thermal measurement easy and efficient.

## Easy Hardware Key Operation even wearing gloves



Frequent operation such as "Temperature Scale Setting" and "Recording" can be performed by hardware key. Comfortable one-hand measurement is possible even wearing gloves.

## "Look Up", "Look Down", "Turn Around", "Attach On", "Put In" — Shoot Freely in Any Styles!

Efficient measurement is possible even in the place such as narrow space and inside a device, etc.



Rotating camera-head by tilting sense provides you comfortable shooting without facing upward to the high angle.



You can shoot from any angle comfortably by the removable camera-head while watching the controller.



The camera-head can be attached to a helmet with a sense of wearable or the controller, and can be attached to a pole as camera stick.

## Up to 70°C heat-resistant camera-head



The small camera-head can be put into a device such as thermostatic chambers. You can operate remotely by touchscreen of the external controller while checking the measurement status.

## Attachable camera to tripod and wall



The camera-head and controller can be mounted on a tripod or fixed on a wall for stable and easy measurement. The camera can be supported various usages with many combinations of commercial accessories freely.